# GRINDLAZER®

Graco's Complete Line of Professional Scarifier Systems

PROVEN QUALITY. LEADING TECHNOLOGY.

MADE IN THE USA WITH GLOBAL COMPONENTS

# THERE IS NOTHING LIKE A GRACO SCARIFYING SYSTEM

Experienced contractors know the difference. Graco GrindLazer professional scarifying solutions are recognized as solid investments that perform reliably, year after year.

### TRUST YOUR BUSINESS AND REPUTATION TO GRACO

Graco is committed to providing the highest quality scarifying equipment available, backed by the industry's best warranty.

### AMERICAN BUILT QUALITY

Graco professional scarifying solutions are designed, manufactured, and assembled in the USA with global components.

### INDUSTRY-LEADING WARRANTY

Behind every Graco sprayer is the industry's strongest warranty. You may never use Graco's warranty—but if you do, we will be there.

## GRACO-ONLY SOLUTIONS TO IMPROVE YOUR PRODUCTIVITY

DEPTH CONTROL SYSTEM™

### ELIMINATE MEASURING AND GUESSWORK

- Quickly and easily adjust the cutter depth to align with the ever-changing terrain
- Achieve accurate cut depth for tape or thermoplastic inlay

### ULTIMATE CONTROL AND FLEXIBILITY

- Set "zero point" where cutter meets the surface
- Displays "active depth" from zero point
- Eliminates damage due to "dropped drums"
- English and metric units

### DURABLE CONTROL DESIGN

- All electronic components are 100% encapsulated—protecting them from vibration and weather conditions
- Push buttons are completely sealed
- Aluminum control enclosure holds up to harsh jobsite environment

### QUIKCUT™ PCD DIAMOND CUTTERS (PATENT PENDING)

- Revolutionary solution for surface prep and coating removal applications
- Last >30X longer than traditional carbide cutters
- Remove up to 4X faster than traditional diamond blades
- Engineered to deliver an extremely consistent profile across the cut path over the life of the cutter
- Patent-pending design allows you to replace individual cutters—saving you time and money

MADE IN THE USA WITH GLOBAL COMPONENTS

# UNLOCK BREAKTHROUGH REMOVAL PERFORMANCE

Graco continues to revolutionize surface preparation and removal applications with our QuikCut PCD Diamond Cutters. When paired with a Graco GrindLazer scarifier, these proprietary cutters enable you to tackle tough removal jobs in a fraction of the time of traditional surface prep methods..

## *THE QUIKCUT PCD ADVANTAGE*

- ***CUTS 4X FASTER THAN DIAMOND BLADE DRUMS***
- ***LASTS >30X LONGER THAN TRADITIONAL CARBIDE CUTTERS***
- ***SHAVES THE SURFACE TO DELIVER A CONSISTENT PROFILE***
- ***REPLACEABLE CUTTER DESIGN SAVES TIME AND MONEY***
- ***THREE PROFILES TO SERVE A WIDE RANGE OF APPLICATIONS***

## PERFECT PROFILES

Graco QuikCut PCD Diamond cutters are available in three profiles to serve a wide range of surface preparation and removal applications

- ***PAVEMENT MARKING REMOVAL***
- ***TRIP HAZARD REMOVAL***
- ***CONCRETE LEVELING***
- ***FLOOR COATING REMOVAL***

**QuikCut PCD Flat**





Creates flat profile that's ideal for traffic paint and thin coatings

**QuikCut PCD Fine**



Creates light profile that provides increased adhesion for durable traffic markings and floor coatings

**QuikCut PCD Coarse**



Creates coarse profile that's ideal for thick coatings and aggressive removal

# INDUSTRY-PROVEN GRACO SCARIFYING SOLUTIONS

Graco offers an expanded line of GrindLazers and cutters that provide the right solutions for all of your scarifier applications.

## CHOOSE THE RIGHT SERIES FOR YOUR BUSINESS

Graco is committed to professional scarifying contractors by offering four different series of scarifying solutions.

graco.com/GrindLazer

| SERIES | APPLICATION | PRODUCTION RATE | DRUM STYLE MODELS | ROTARY STYLE MODELS | DRUM STYLE CUTTERS | ROTARY STYLE CUTTERS |
|---|---|---|---|---|---|---|
| HANDHELD SERIES | Touch-ups, edging, and removal in hard to reach areas | 100 sq ft/hr | Standard DC21 E | Standard RC71 E | Carbide Flail<br>Carbide Star<br>Steel Star | Carbide Flail<br>Carbide Star<br>Steel Star |
| STANDARD SERIES | Basic surface prep, repairs, and line removal | 300-400 sq ft/hr | Standard DC87 G<br>Standard DC89 G | | Wire Brush<br>Steel Star<br>Steel Beam<br>Carbide Flail<br>Carbide Flat<br>Carbide-Tipped Miller<br>Full-Carbide Miller<br>QuikCut PCD | |
| PROFESSIONAL SERIES | All surface prep, repairs, and line removal needs; use rotary model for marking removal without leaving grooves | 600-800 sq ft/hr | Pro DC89 G<br>Pro DC1013 G<br>Pro DC1013 G DCS | Pro RC813 G<br>Pro RC813 G DCS | Wire Brush<br>Steel Star<br>Steel Beam<br>Carbide Flail<br>Carbide Flat<br>Carbide-Tipped Miller<br>Full-Carbide Miller<br>Carbide Pick<br>Diamond Blade<br>QuikCut PCD | Wire Brush<br>Carbide Pin<br>Carbide Pick |
| HIGH PRODUCTION SERIES | High production removal jobs including leveling, and inlay, and all surface coatings | 1,300-3,500 sq ft/hr | HP DC89 G<br>HP DC1013 G<br>HP DC1021 G<br>HP DC1013 G DCS<br>HP DC1021 G DCS<br>HP DC1520 E DCS<br>HP DC1525 P DCS<br>HP DC1538 G DCS | HP RC820 H<br>HP RC1625 G<br>HP RC1640 H | | |

# SURFACE PREPARATION

Proper coating adhesion requires proper surface preparation. It is critical to remove all surface contaminants to leave the surface clean, dry, properly profiled, and sound.

Graco offers a full range of scarifiers and cutters to create the correct surface profile (SP) while leaving the surface looking untouched, guaranteeing good coating adhesion.

**CONCRETE**

**ASPHALT**

## DRUM STYLE CUTTERS

| | CONCRETE | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | DIRT/DEBRIS REMOVAL | GREASE/OIL REMOVAL | CURING COMPOUND | PAINT REMOVAL | EPOXY/2K PAINT REMOVAL | THERMOPLASTIC REMOVAL | TAPE REMOVAL | TRIP HAZARD REMOVAL | SURFACE LEVELING | ANTI-SLIP GROOVING | INLAY - THERMOPLASTIC | INLAY - TAPE |
| WIRE BRUSH | Best | Suitable | Best | | | | | | | | | |
| STEEL STAR | | Best | Suitable | | | | | | | | | |
| STEEL BEAM | | Best | Suitable | Best | | | | | | | | |
| CARBIDE FLAIL | | | | Suitable | Suitable | | | Best | Suitable | Suitable | | |
| CARBIDE FLAT | | | | Suitable | Suitable | Suitable | | | | | | |
| CARBIDE-TIPPED MILLER | | | | | Suitable | Best | Best | | | | | |
| FULL-CARBIDE MILLER | | | | | Suitable | Best | Best | | | | | |
| CARBIDE PICK | | | | | | | | Suitable | Suitable | | | |
| DIAMOND BLADE | | | | | | | | | Best | Best | Best | Best |
| QUIKCUT PCD FLAT | | | | Best | Best | Best | Suitable | Suitable | Suitable | | Suitable | |
| QUIKCUT PCD FINE | | | | Best | Best | Best | Suitable | Best | Best | | Best | |
| QUIKCUT PCD COARSE | | | | Suitable | Suitable | Best | Suitable | Best | Best | Best | Best | |

| | ASPHALT | | | | | | | | | | | SURFACE PROFILE | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | DIRT/DEBRIS REMOVAL | GREASE/OIL REMOVAL | PAINT REMOVAL | EPOXY/2K PAINT REMOVAL | THERMOPLASTIC REMOVAL | TAPE REMOVAL | TRIP HAZARD REMOVAL | SURFACE LEVELING | ANTI-SLIP GROOVING | INLAY - THERMOPLASTIC | INLAY - TAPE | SP1 (10-30 MILS) | SP2 (30-35 MILS) | SP3 (35-40 MILS) | SP4 (40-60 MILS) | SP5 (60-80 MILS) | SP6 (80-120 MILS) | SP7 (120-160 MILS) | SP8 (160-200 MILS) | SP9 (200-240 MILS) | SP10 (240-280 MILS) |
| WIRE BRUSH | Best | Suitable | | | | | | | | | | F | | | | | | | | | |
| STEEL STAR | | Best | Suitable | | | | | | | | | | F / M | | | | | | | | |
| STEEL BEAM | | Best | Suitable | Suitable | | | | | | | | | F / M | | | | | | | | |
| CARBIDE FLAIL | | | Suitable | Suitable | | | Suitable | Suitable | Suitable | | | | | | | F / M / C | | | | | |
| CARBIDE FLAT | | | Best | Best | Suitable | | | | | | | | | | F / M / C | | | | | | |
| CARBIDE-TIPPED MILLER | | | | Suitable | Best | Best | | | | | | | | F / M / C | | | | | | | |
| FULL-CARBIDE MILLER | | | | Suitable | Best | Best | | | | | | | | F / M / C | | | | | | | |
| CARBIDE PICK | | | | | | | Suitable | Suitable | | | | | | | | | | | F / M / C | | |
| DIAMOND BLADE | | | | | | | | Best | Best | Best | Best | F / M | | | | | | | | | |
| QUIKCUT PCD FLAT | | | Best | Best | Best | Suitable | Best | Best | | Suitable | | | F | | | | | | | | |
| QUIKCUT PCD FINE | | | Best | Best | Best | Suitable | Best | Best | | Best | | | | M | | | | | | | |
| QUIKCUT PCD COARSE | | | Suitable | Suitable | Best | Suitable | Best | Best | Best | Best | | | | | | C | | | | | |

## ROTARY STYLE CUTTERS

| | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| WIRE BRUSH | Best | Suitable | Best | | | | | | | | | |
| CARBIDE PIN 72 | | | | Best | Best | Suitable | | | | | | |
| CARBIDE PIN 48 | | | | Suitable | Suitable | Best | Best | | | | | |
| CARBIDE PIN 24 | | | | Suitable | Suitable | Suitable | Suitable | | | | | |
| CARBIDE PICK | | | | | Best | Best | | | | | | |

| | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| WIRE BRUSH | Best | Suitable | | | | | | | | | | F | | | | | | | | | |
| CARBIDE PIN 72 | | | Best | Suitable | Suitable | | | | | | | | | | F | | | | | | |
| CARBIDE PIN 48 | | | Suitable | Best | Suitable | Suitable | | | | | | | | | | M | | | | | |
| CARBIDE PIN 24 | | | Suitable | Suitable | Best | Best | | | | | | | | | | | C | | | | |
| CARBIDE PICK | | | | Best | Best | | | | | | | | F / M | | | | | | | | |

BEST CUTTER CHOICE

SUITABLE CUTTER CHOICE

# GRINDLAZER HANDHELD SERIES

## DC21 E AND RC71 E

The GrindLazer Standard DC21 E and Standard RC71 E are great choices for those small surface preparation jobs. Rugged, compact design makes removal of paint on horizontal and vertical surfaces quick and easy. Available in both drum (DC21 E) and rotary (RC71 E) styles.

### LONG LIFE ON THE MOST CHALLENGING JOBS

- Steel and high-impact plastic construction
- Proven Makita® motor and drive

### COMFORT AND FLEXIBILITY

- Reversible handle accommodates right- or left-handed users (available on DC21 E only)

### MAINTENANCE-FREE DESIGN

- Sealed bearings for extended life and ease of use

### DUST REMOVAL

- Vacuum port for LazerVac™ vacuum system

| HANDHELD SERIES GRINDLAZERS | PART # |
|---|---|
| DC21 E w/ Carbide Flail Cutter | 25M841 |
| RC71 E w/ Carbide Flail Cutter | 25M848 |





# GRINDLAZER STANDARD SERIES

## DC87 G AND DC89 G

The GrindLazer Standard DC87 G (6.5 HP) and DC89 G (9.0 HP) Series scarifiers are great options for those smaller traffic marking removal jobs, trip hazard removal, and for preparing a surface before applying new traffic markings.

### JOBSITE TOUGH DESIGN

**Heavy-Duty All-Steel Frame**

### CONTRACTOR-PREFERRED POWER

**Durable Honda® Power with Cyclone™ Filter**

- Cyclone filter protects the engine from harmful airborne dust

### EASY MICRO AND MACRO ADJUSTMENTS

**Dual Depth Control**

- Multi-position lever and rotating knob controls

### REDUCED VIBRATION FOR ALL-DAY COMFORT

**Comfort Grip Handles**

### USER-FRIENDLY OPERATION

- Adjustable handlebar to fit different operators
- Easy-to-reach throttle control

### BUILT-IN APPLICATION FLEXIBILITY

**Swivel and Fixed Front Wheel**

- Swivel Wheel for feathering applications
- Fixed Wheel for straight line removal

### MAINTENANCE-FREE DESIGN

**Sealed Main Bearing**

- Long life and ease of use

### DURABLE HIGH-TORQUE POWER TRANSFER

**Triple Drive Belts**

### DUST REMOVAL

- Vacuum port for LazerVac vacuum system

### EASY-TO-READ GAUGES

**Dual Purpose Tachometer and Hour Meter**

- Ideal for maintenance — ensuring your equipment is in top shape
- Displays engine RPMs while running

*Standard DC89 G shown*

| STANDARD SERIES GRINDLAZERS | PART # |
|---|---|
| DC87 G (bare) | 25M842 |
| DC89 G (bare) | 25M843 |

| STANDARD SERIES ACCESSORIES | PART # |
|---|---|
| Dust Suppression Water Kit | 25N367 |
| Edger Kit | 25M933 |
| Steel Beam, 2" Fine Edger Drum | 25N442 |
| Carbide Flail, 2" Medium Edger Drum | 25N443 |
| Carbide Flail, 2" Fine Edger Drum | 25N444 |

# GRINDLAZER PROFESSIONAL SERIES

## PRO DC89 G AND PRO DC1013 G

The GrindLazer Pro DC89 G and Pro DC1013 G are high-output drum-style cutting options with a 9 HP or 13 HP Honda engine, 8 in or 10 in maximum cut width, and larger selection of cutters for marking removal, leveling and, surface preparation.

*Pro DC1013 G shown*

## FEATURES FOUND ON ALL PROFESSIONAL SERIES SCARIFIERS

### JOBSITE TOUGH DESIGN

**Heavy-Duty All-Steel Frame**

### CONTRACTOR-PREFERRED POWER

**Durable 9 HP or 13 HP Honda Power with Cyclone Filter**

- Cyclone filter protects the engine from harmful airborne dust

### EFFICIENT "NO-BOUNCE" CUTTING

**Center-Weight Design**

- Better control for a better quality cut

### EASY CUTTER DEPTH CONTROL

**DialDown™ Depth Control System**

- Easy to "dial down" for precise cutting depth control

### ACCURATE CUTS AND LONG LIFE

- Precision All-Steel Wheel Assemblies

| PROFESSIONAL SERIES GRINDLAZERS | PART # |
|---|---|
| PRO DC89 G (bare) | 25N667 |
| PRO DC1013 G (bare) | 25M846 |

| PROFESSIONAL SERIES ACCESSORIES | PART # |
|---|---|
| Dust Suppression Water Kit | 25N368 |
| High Speed Pulley Kit (for inlay applications w/Diamond Drum only) | 25M893 |
| Edger Kit | 25M951 |
| Steel Beam, 4" Fine Edger Drum | 25N445 |
| Carbide Flail, 4" Medium Edger Drum | 25N446 |
| Carbide Flail, 4" Fine Edger Drum | 25N447 |





# GRINDLAZER PROFESSIONAL SERIES

## PRO DC1013 G DCS

The GrindLazer Pro DC1013 G DCS has the added benefit of a Depth Control System and Electric Start — increasing your accuracy and reducing fatigue.

*Pro DC1013 G DCS shown*

### ELIMINATE MEASURING AND GUESSWORK

**GrindLazer Depth Control System**

- Quickly and easily adjust the cutter depth to align with ever-changing terrain
- Eliminates damage due to "dropped drums"

### ULTIMATE CONTROL AND APPLICATION FLEXIBILITY

**DCS Controller**

- Set "zero point" where cutter meets surface
- Displays "active depth" from zero point
- English and metric units
- Robust design stands up to the harsh abuse:
  - Fully encapsulated electronic components
  - Ultimate protection from vibration, jobsite, and weather conditions

### TOTAL OPERATOR CONTROL

**Remote Momentary Switch**

- Control cut depth while keeping both hands on the GrindLazer

### REDUCED FATIGUE

**Electric Start on all DCS units**

- Simple start-up with the turn of a key

### ANTI-VIBRATION HANDLEBARS

- Padded for minimal vibration transfer for all-day comfort

### MAINTENANCE-FREE DESIGN

**Sealed Main Bearing**

- Long life and ease of use

### ELIMINATE COSTLY DOWNTIME

**Heavy-Duty Wide HTD Drive Belt**

### DUST REMOVAL

- Vacuum port for LazerVac vacuum system

### EASY-TO-READ GAUGES

**Dual Purpose Tachometer and Hour Meter**

- Ideal for maintenance — ensuring your equipment is in top shape
- Displays engine RPMs while running

| PROFESSIONAL SERIES GRINDLAZER | PART # |
|---|---|
| PRO DC1013 G DCS (bare) | 25N668 |

# GRINDLAZER PROFESSIONAL SERIES

## PRO RC813 G

The GrindLazer Pro RC813 G is the ideal choice for when you need to remove lines without grooves. The rotary action of this scarifier hovers over the surface, resulting in line removal without leaving any ghost lines — making this the No-Groove Line Eraser.

*Pro RC813 G shown*

POWERED by HONDA

### FEATURES FOUND ON ALL PROFESSIONAL ROTARY SCARIFIERS

#### NO GHOST LINES

**No-Groove Line Eraser**

- Rotary cut removes lines without leaving any grooves

#### CONTRACTOR-PREFERRED POWER

**Durable Honda Power with Electric Start**

- Easy starting with the push of a button — even in cold weather

#### JOBSITE TOUGH DESIGN

**Heavy-Duty All-Steel Frame**

#### ULTIMATE "NO DAMAGE" CONTROL

**Advanced Depth-Control System**

- Independent adjustment for pitch, depth, and pressure

| PROFESSIONAL SERIES GRINDLAZER | PART # |
|---|---|
| PRO RC813 G (bare) | 25M847 |





# GRINDLAZER PROFESSIONAL SERIES

## PRO RC813 G DCS

The GrindLazer Pro RC813 G DCS has the added benefit of a Depth Control System — increasing your accuracy and reducing fatigue.

*Pro RC813 G DCS shown*

POWERED by HONDA

#### ELIMINATE MEASURING AND GUESSWORK

**GrindLazer Depth Control System**

- Quickly and easily adjust the cutter depth to align with ever-changing terrain
- Eliminates damage due to "dropped cutters"

#### ULTIMATE CONTROL AND APPLICATION FLEXIBILITY

**DCS Controller**

- Set "zero point" where cutter meets surface
- Displays "active depth" from zero point
- English and metric units
- Robust design stands up the harsh abuse
  - Fully encapsulated electronic components
  - Ultimate protection from vibration, jobsite, and weather conditions

#### TOTAL OPERATOR CONTROL

**Remote Momentary Switch**

- Control cut depth while keeping both hands on the GrindLazer

#### JOBSITE TOUGH

**Linear Actuator**

- Robust linear motor stands up to highly abusive environments

#### QUICK CUTTER REMOVAL

**Tilt-Up Chassis**

- Toolless design for quick, easy cutter change-out

#### ALL-DAY COMFORT

**Adjustable, Anti-Vibration Handle Bars**

- Padded and adjustable for all users

#### DUST REMOVAL

- Vacuum port for LazerVac vacuum system

#### MAINTENANCE-FREE DESIGN

**Sealed Bearings**

- Maintenance-free design for long life and ease of use

#### EASY-TO-READ GAUGES

**Dual Purpose Tachometer and Hour Meter**

- Ideal for maintenance — ensuring your equipment is in top shape
- Displays engine RPMs while running

| PROFESSIONAL SERIES GRINDLAZER | PART # |
|---|---|
| PRO RC813 G DCS (bare) | 25N669 |

# GRINDLAZER HIGH PRODUCTION SERIES

## HP DC89 G AND HP DC1013 G

The GrindLazer HP DC89 G and HP DC1013 G provide high production, general line removal. With 9 HP or 13 HP Honda engines, 8 in or 10 in maximum cut widths, and larger selection of cutters, the rugged, innovative designs mean you can count on either to perform for a lifetime of use. The EasyGlide™ Wheel Mount System allows either to be used with a LineDriver® as well.

*HP DC89 G shown*

**DOUBLE YOUR PRODUCTIVITY**
Add a LineDriver for unmatched performance

## FEATURES FOUND ON ALL HIGH PRODUCTION SERIES SCARIFIERS

### MAXIMUM ROAD HANDLING

**TriBelt™ Drive System**

- 3-cog belt design optimizes power transfer and eliminates costly downtime

### FAST, EASY TURNING

**Fat Track™ Front Swivel Wheel**

- Proven front caster wheel system makes turning fast and easy
- Maneuver curves better
- No need to "muscle it" while moving

### SAFER, EASIER TO MANEUVER

**EasyGlide Wheel Mount System**

- Front-mounted caster along with dual rear pneumatic air-filled tires
- Pneumatic air-filled tires help eliminate vibration

### SAFER OPERATION

**Extreme-Duty ProStart™ System**

- Easy cutter start/stop with centrifugal clutch
- Easy cold-weather starting
- Provides longer belt life and eliminates broken recoils

| HIGH PRODUCTION SERIES GRINDLAZERS | PART # |
|---|---|
| HP DC89 G (bare) | 25M992 |
| HP DC1013 G (bare) | 25M993 |

| HP SERIES ACCESSORIES | PART # |
|---|---|
| Dust Suppression Water Kit | 25N367 |
| Retractable Line Pointer Guide | 24D984 |





# GRINDLAZER HIGH PRODUCTION SERIES

## HP DC1013 G DCS

The GrindLazer HP DC1013 G DCS has the added benefit of a Depth Control System and Electric Start — increasing your accuracy and reducing fatigue.

*HP DC1013 G DCS shown*

### ELIMINATE MEASURING AND GUESSWORK

**GrindLazer Depth Control System**

- Quickly and easily adjust the cutter depth to align with ever-changing terrain
- Eliminates damage due to dropped drums

### ULTIMATE CONTROL AND APPLICATION FLEXIBILITY

**DCS Controller**

- Set "zero point" where cutter meets surface
- Displays "active depth" from zero point
- English and metric units
- Robust design stands up the harsh abuse:
  - Fully encapsulated electronic components
  - Ultimate protection from vibration, jobsite, and weather conditions

### TOTAL OPERATOR CONTROL

**Remote Momentary Switch**

- Control cut depth while keeping both hands on the GrindLazer

### REDUCED FATIGUE

**Electric Start on all DCS units**

- Simple start-up with the turn of a key

### EASY CUTTER DEPTH CONTROL

**DialDown Depth Control System**

- Easy to "dial down" for precise cutting depth control with multiple positions

### ALL-DAY COMFORT

**Vibration Reduction Technology**

- Up to 4X less vibration than the competition
- Pneumatic air-filled tires, comfort grips, and cart design combine to eliminate vibration, reducing user fatigue
- Comfort-grip handlebars for precise steering

### ULTIMATE REMOVAL

**InstaCut Technology**

- Only unit to offer "hands-on" engagement of the cutting deck system for up or down position
- Allows deck to "float" when on uneven surfaces
- No-tool system

### DUST REMOVAL

- Vacuum port for LazerVac vacuum system

| HIGH PRODUCTION SERIES GRINDLAZER | PART # |
|---|---|
| HP DC1013 G DCS (bare) | 25N658 |

# GRINDLAZER HIGH PRODUCTION SERIES

## HP DC1021 G

The GrindLazer HP DC1021 G is the high production choice when it comes to the most demanding scarifier jobs. Its "Up-Cut" cutting direction allows you to remove all types of lines found on parking lots or roadways while having the power for inlay/grooving jobs.

**LINEDRIVER REQUIRED**
GrindLazer HP DC1021 G with Reverse/"Up-Cut" cutting direction requires the use of a LineDriver Propel System.

*HP DC1021 G shown*

## FEATURES FOUND ON ALL HIGH PRODUCTION SERIES SCARIFIERS

### MAXIMUM ROAD HANDLING

**TriBelt Drive System**

- 3-cog belt design optimizes power transfer and eliminates costly downtime

### FAST, EASY TURNING

**Fat Track Front Swivel Wheel**

- Proven front caster wheel system makes turning fast and easy
- Maneuver curves better
- No need to "muscle it" while moving

### SAFER, EASIER TO MANEUVER

**EasyGlide Wheel Mount System**

- Front-mounted caster along with dual rear pneumatic air-filled tires
- Pneumatic air-filled tires help eliminate vibration

### SAFER OPERATION

**Extreme-Duty ProStart System**

- Easy cutter start/stop with centrifugal clutch is one of the safest units on the market today
- Easy cold-weather starting with the turn of a key

| HIGH PRODUCTION SERIES GRINDLAZER | PART # |
|---|---|
| HP DC1021 G (bare) | 25M994 |

| HP SERIES ACCESSORIES | PART # |
|---|---|
| Dust Suppression Water Kit | 25N367 |
| Retractable Line Pointer Guide | 24D984 |





# GRINDLAZER HIGH PRODUCTION SERIES

## HP DC1021 G DCS

The GrindLazer HP DC1021 G DCS has the added benefit of a Depth Control System and Electric Start — increasing your accuracy and reducing fatigue.

### ELIMINATE MEASURING AND GUESSWORK

**GrindLazer Depth Control System**

- Quickly and easily adjust the cutter depth to align with ever-changing terrain
- Accurate cut depth for tape or thermoplastic inlays
- Eliminates damage due to dropped drums

*HP DC1021 G DCS shown*

### ULTIMATE CONTROL AND APPLICATION FLEXIBILITY

**DCS Controller**

- Set "zero point" where cutter meets surface
- Displays "active depth" from zero point
- English and metric units
- Robust design stands up the harsh abuse:
  - Fully encapsulated electronic components
  - Ultimate protection from vibration, jobsite, and weather conditions

### TOTAL OPERATOR CONTROL

**Remote Momentary Switch**

- Control cut depth while keeping both hands on the GrindLazer, even while seated on the LineDriver

### REDUCED FATIGUE

**Electric Start on all DCS units**

- Simple start-up with the turn of a key

### EASY CUTTER DEPTH CONTROL

**DialDown Depth Control System**

- Easy to dial down for precise cutting depth control with multiple positions

### ALL-DAY COMFORT

**Vibration Reduction Technology**

- Up to 4X less vibration than the competition
- Pneumatic air-filled tires, comfort grips, and cart design combine to eliminate vibration, reducing user fatigue
- Comfort-grip handlebars for precise steering

### ULTIMATE REMOVAL OR INLAY FLEXIBILITY

**InstaCut™ Technology**

- Only unit to offer hands-on engagement of the cutting deck system for up or down position
- Allows deck to float when on uneven surfaces
- No-tool system

### DUST REMOVAL

- Vacuum port for LazerVac vacuum system

| HIGH PRODUCTION SERIES GRINDLAZER | PART # |
|---|---|
| HP DC1021 G DCS (bare) | 25N659 |

# GRINDLAZER HIGH PRODUCTION SERIES

## DC1538 G, DC1525 P, AND DC1520 E DCS

The DC15 DCS series of heavy-duty, self-propelled drum scarifiers are designed to tackle the most demanding removal and surface preparation jobs. They are capable of removing a path up to 15 inches wide and feature Graco's electronic DCS Depth Control System; allowing users to quickly and accurately adjust cut depth without stopping production. They are available in gasoline, electric, and propane-powered models to serve nearly any application.

*HP DC1525 P DCS shown*

*HP DC1520 E DCS shown*

*HP DC1538 G DCS shown*

DEPTH CONTROL SYSTEM

## ON-THE-FLY DEPTH CONTROL

### Adjust Cut Depth Without Stopping Production

The days of manually adjusting cutter depth are over. Graco's electronic Depth Control System raises and lowers your cutter with the push of a button.

## FEATURES FOUND ON ALL HIGH PRODUCTION DC15 SCARIFIERS

### DO-IT-ALL SOLUTION

- Adaptable for leveling, grooving, scarifying, and removing coatings
- Up to 15 in cut path
- Wide variety of cutters available
- Quick-change side plate for easier drum removal

### SELF-PROPELLED

- Variable-speed hydrostatic drive allows user to dial-in the speed for each application

### DESIGNED FOR THE TOUGHEST JOBS

- All-steel chassis
- Low-vibration design
- Long-life bearings

### MULTIPLE POWER OPTIONS

- 38 HP Kohler® EFI Gasoline
- 25 HP Kohler EFI Propane
- 20 HP, 380/480v, 3ph

### DUST REMOVAL

- Dust port for connecting to LazerVac™ vacuum systems

### ELIMINATE MEASURING AND GUESSWORK

- Quickly and precisely adjust the cutter depth with the push of a button
- Achieve accurate cut depth for leveling, grooving, and inlay
- Eliminate damage due to "dropped drums"

### TOTAL OPERATOR CONTROL

- Easy adjustment via control panel buttons
- Set "zero point" where the cutter meets the surface
- Adjust cut depth in 0.01 inch increments
- Displays "active depth" from zero point
- English and metric units

### DURABLE, MAINTENANCE-FREE DESIGN

- Aluminum control enclosure holds up to harsh jobsite environments
- All electronic components are 100% encapsulated to protect against vibration and weather
- Linear actuator is enclosed in a sealed case to resist water, dust, and debris

| HP DC1520 E DCS (ELECTRIC MODEL) | PART # |
|---|---|
| With Low-Speed Pulley Kit for Carbide Flail Drums | 25R102 |
| With High-Speed Pulley Kit for Diamond/PCD Drums | 25P476 |
| **HP DC1525 P DCS (PROPANE MODEL)** | |
| With Low-Speed Pulley Kit for Carbide Flail Drums | 25R101 |
| With High-Speed Pulley Kit for Diamond/PCD Drums | 25P475 |
| **HP DC1538 G DCS (GASOLINE MODEL)** | |
| With Low-Speed Pulley Kit for Carbide Flail Drums | 25R100 |
| With High-Speed Pulley Kit for Diamond/PCD Drums | 25P474 |

| HP DC15 SERIES ACCESSORIES | PART # |
|---|---|
| Outboard Wheel Kit for Levelling Machine | 19B634 |
| **HIGH-SPEED CONVERSION KIT FOR USING DIAMOND OR PCD DRUMS** | |
| For HP DC1520 E DCS (Electric Model) | 25U322 |
| For HP DC1525 P DCS (Propane Model) | 25U323 |
| For HP DC1538 G DCS (Gasoline Model) | 25Y324 |
| **LOW-SPEED CONVERSION KIT FOR USING CARBIDE FLAIL DRUMS** | |
| For HP DC1520 E DCS (Electric Model) | 25U325 |
| For HP DC1525 P DCS (Propane Model) | 25U731 |
| For HP DC1538 G DCS (Gasoline Model) | 25U730 |

# GRINDLAZER HIGH PRODUCTION SERIES

## HP RC820 H

The GrindLazer HP RC820 H rotary scarifier is designed for high-volume marking removal. It is designed to be mounted to skid steer equipment with low-flow hydraulic systems and uses a variety of rotary cutter assemblies to remove different types of markings.

### HIGH-VOLUME REMOVAL

**Single Cutter Head**

- Removes 8 inch wide path
- Allows for removal on uneven surfaces

### HYDRAULIC POWER

**Low-Flow Hydraulic System**

- Operates off most low-flow hydraulic systems

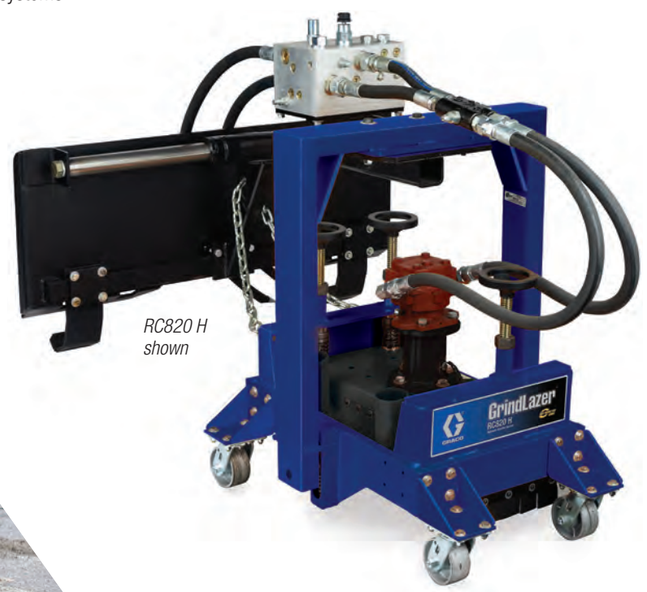

*RC820 H shown*

## FEATURES FOUND ON ALL HIGH PRODUCTION ROTARY SCARIFIERS

### NO GHOST LINES

**No-Groove Line Eraser**

- Rotary cut removes lines without leaving any grooves

### ULTIMATE "NO DAMAGE" CONTROL

**Depth Control System**

- Multi-point depth adjustment for accurate depth control

**Spring suspension**

- Allows cutters to "float" on surface

### UNIVERSAL ATTACHMENT

**Bob-Tach® Quick-Attach Backplate**

- Quick, tool-free connection to most skid loader equipment

### JOBSITE TOUGH DESIGN

- Heavy-Duty All-Steel Frame

### DUST REMOVAL

- Vacuum port for LazerVac vacuum system

| HIGH PRODUCTION SERIES GRINDLAZER | PART # |
|---|---|
| HP RC820 H (bare) | 25P471 |





# GRINDLAZER HIGH PRODUCTION SERIES

## HP RC1640 H AND RC1625 G

The GrindLazer HP RC1640 H and HP RC1625 G rotary scarifiers offer the highest rate of groove-free marking removal and can be used to remove markings on both concrete and asphalt surfaces. These two machines use three cutter assemblies to remove a path up to 16 inches wide. The RC1640 H operates off the vehicle's high-flow hydraulic system, while a 25HP gasoline engine powers the RC1625 G.

*RC1625 G shown*

### ULTIMATE REMOVAL

**Adjustable Cut Width**

- Three cutter heads can be swiveled to remove a path up to 16 inches wide

### MULTIPLE POWER OPTIONS

- High-Flow Hydraulic (HP RC1640 H)
- 25HP Kohler® Gasoline Engine (HP RC1625 G)

*RC1640 H shown*

| HIGH PRODUCTION SERIES GRINDLAZERS | PART # |
|---|---|
| HP RC1640 H (bare) | 25P472 |
| HP RC1625 G (bare) | 25P473 |

# CUTTERS

## EXPANDED LINEUP FOR ALL APPLICATIONS AND SURFACE PROFILES

Graco offers multiple types of cutters to achieve a full range of surface profiles and removal application.

DRUM STYLE CUTTERS

### DRUM APPLICATIONS (12 CUTTER TYPES)

- Grooving — improving traction and preparing surfaces for coatings
- Removing coatings such as paint and thermoplastic
- Surface leveling — taking down high spots (trip hazards)
- Inlay — thermoplastic and tape

| Wire Brush | Steel Star | Steel Beam | Carbide Flail | Carbide Flat |
|---|---|---|---|---|
| 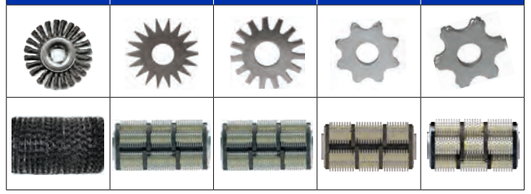 | | | | |

| Carbide-Tipped Miller | Full-Carbide Miller | Carbide Pick | Diamond Blade | QuikCut PCD Flat | QuikCut PCD Fine | QuikCut PCD Coarse |
|---|---|---|---|---|---|---|
| 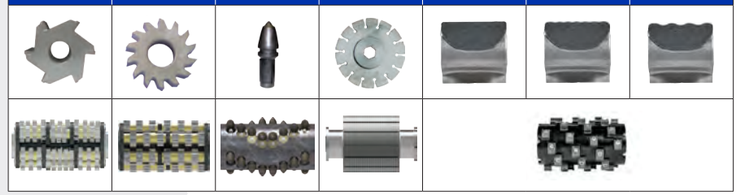 | | | | | | |

| Wire Brush | Carbide Pin 72 | Carbide Pin 48 | Carbide Pin 24 | Carbide Pick |
|---|---|---|---|---|
| | | | | |

ROTARY STYLE CUTTERS

### ROTARY APPLICATIONS (5 CUTTER TYPES)

- Paint/thermoplastic removal
- Surface preparation without grooves

### GROOVE-FREE REMOVAL

Rotary cutters hover on the surface, removing lines without leaving grooves.





NEW

# QUIKCUT™ PCD DIAMOND CUTTERS

Graco's QuikCut PCD Diamond Cutters are revolutionizing surface preparation and coating removal applications by using self-sharpening polycrystalline diamond technology to gently shave the surface. These cutters feature a highly-densified PCD material optimized for high-impact applications; enabling them to last over 30X longer than traditional carbide flails. An efficient drum design enables them to cut up to 2X faster than competitive PCD drums while delivering an extremely consistent profile across the cut path.

**NEXT-LEVEL DURABILITY**
- Highly-Densified PCD material optimized for greater durability in high-impact applications
- Lasts >30X longer than traditional carbide cutters
- Self-sharpening cutting edge maintains profile for the life of the cutter

**FASTER REMOVAL**
- Efficient cutter layout accelerates removal rates without compromising cut quality
- Cuts up to 2X faster than competitive PCD drums
- Cuts 4X faster than traditional diamond blades

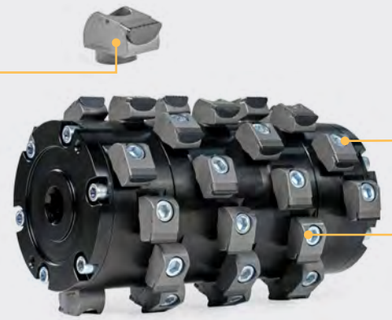

**LOWER REPLACEMENT COSTS**
- Patent-pending design allows you to replace indiviual cutters — saving you time and money.

**SUPERIOR PROFILE CONSISTENCY**
- Engineered to deliver a consistent profile across the cut path
- Ideal for a full range of applications — including indoor flooring

**QuikCut PCD Flat**

Creates flat profile that's ideal for traffic paint and thin coatings

**QuikCut PCD Fine**

Creates light profile that provides increased adhesion for durable traffic markings and floor coatings

**QuikCut PCD Coarse**



Creates coarse profile that's ideal for thick coatings and aggressive removal

# DIAMOND BLADES

Graco diamond drums are great for shaving, grooving, and performing inlay for traffic tape and thermoplastic. They can be setup to provide a wide variety of different groove patterns.

# CARBIDE CUTTERS

Graco offers a variety of carbide cutters for nearly any application. These cutters use high-quality tungsten carbide to ensure a long service life.

**Carbide Flails**
- Ideal for removing paint and epoxy markings, surface leveling, and removing trip hazards

**Carbide Flats**
- These versatile cutters use a flat carbide pin to strip, mill, and clean concrete and asphalt surfaces

**Carbide-Tipped Millers**
- Millers scrape the surface to remove markings, making them a suitable choice for removing paint, epoxy, tape, and thermoplastic

**Full Carbide Millers**
- Similar to carbide-tipped millers, but cast entirely from carbide for a longer service life

**Carbide Picks**
- Available for drum and rotary scarifiers, carbide picks are ideal for applications requiring aggressive removal of thick coatings or material

# STEEL CUTTERS

Graco offers a variety of cutters manufactured from high-quality steel. These cutters are a great for light-duty jobs such as removing oil, grease, curing compounds, or thin paint coatings. They are heat-treated for a longer service life.

**Steel Beam**
- Ideal for gentle removal

**Steel Star**
- Provide deeper penetration of substrate



GRACO CUTTERS

# CARBIDE PIN ROTARY CUTTERS

These cutters are the ideal choice for removing markings without leaving grooves. A rotary scarifier floats these cutters on the surface, enabling them to chip and scratch the coating off without damaging the underlying substrate.

**24 Pin**
- Ideal for removing tough coatings such as thermoplastic and thick epoxy

**48 Pin**
- Great all-around cutter for removing thermoplastic, epoxy, or thick paint coatings

**72 Pin**
- Ideal for removing thin coatings such as paint

# WIRE BRUSH

Wire brushes are ideal for removing curing compounds and cleaning surfaces without damaging the substrate. Graco offers wire brushes for both drum and rotary equipment.

## DRUM STYLE CUTTERS



Steel Star | Carbide Star | Carbide Flail

## USED ON: GRINDLAZER STANDARD DC21 E

| Individual Cutter | Fully Assembled Drum | Drum Rebuild Kit | Cutter Type | Profile | Cut Width | # Cutters | # Spacers | # Rods |
|---|---|---|---|---|---|---|---|---|
| 19A009 | | | Carbide Flail | | | 1 | | |
| | 25M891 | 25M892 | Carbide Flail | Fine | 2 in | 48 | 6 | 6 |
| | 25M889 | 25M890 | Carbide Flail | Medium | 2 in | 36 | 42 | 6 |
| | 25N060 | 25N065 | Carbide Flail | Coarse | 2 in | 30 | 60 | 6 |
| 19A063 | | | Steel Star | | | 1 | | |
| | 25M909 | 25M910 | Steel Star | Fine | 2 in | 90 | 0 | 6 |
| | 25M905 | 25N066 | Steel Star | Medium | 2 in | 54 | 60 | 6 |
| 19A005 | | | Carbide Star | | | 1 | | |
| | 25M903 | 25M904 | Carbide Star | Fine | 2 in | 54 | 0 | 6 |
| | 25M901 | 25M902 | Carbide Star | Medium | 2 in | 42 | 36 | 6 |

### HANDHELD DRUM COMPONENTS

| Part Number | Description |
|---|---|
| 17W425 | Spacer - Handheld Drum |
| 19A416 | Shaft - Handheld Drum |
| 19A417 | End Plate - Handheld Drum |
| 17W879 | Bare Drum (includes Arbor, Shafts, End Plates, and Fasteners) |





## ROTARY STYLE CUTTERS

Steel Star | Carbide Star | Carbide Flail

## USED ON: GRINDLAZER STANDARD RC71 E

| Individual Cutter | Fully Assembled Drum | Drum Rebuild Kit | Cutter Type | Profile | Cut Width | # Cutters | # Spacers | # Rods |
|---|---|---|---|---|---|---|---|---|
| 19A009 | | | Carbide Flail | | | 1 | | |
| | 25M915 | 25M916 | Carbide Flail | Fine | 7 in | 28 | 7 | 7 |
| | 25M911 | 25N068 | Carbide Flail | Medium | 7 in | 21 | 21 | 7 |
| 19A063 | | | Steel Star | | | 1 | | |
| | 25M919 | 25M920 | Steel Star | Fine | 7 in | 56 | 7 | 7 |
| | 25M917 | 25M918 | Steel Star | Medium | 7 in | 28 | 35 | 7 |
| 19A005 | | | Carbide Star | | | 1 | | |
| | 25M931 | 25M932 | Carbide Star | Fine | 7 in | 28 | 14 | 7 |
| | 25M929 | 25M930 | Carbide Star | Medium | 7 in | 21 | 28 | 7 |

### HANDHELD DRUM COMPONENTS

| Part Number | Description |
|---|---|
| 19A414 | Spacer - Handheld Rotary |
| 17W888 | Shaft - Handheld Rotary |
| 17W889 | Bare Drum (includes Arbor only) |

DRUM STYLE CUTTERS

## USED ON:
## GRINDLAZER STANDARD DC87
## GRINDLAZER STANDARD DC89

| Individual Cutter | Fully Assembled Drum | Drum Rebuild Kit | Cutter Type | Profile | Cut Width | # Cutters | # Spacers | # Rods |
|---|---|---|---|---|---|---|---|---|
| | 25M950 | | Wire Brush | Fine | 8 in | | | |
| 19A064 | | | Steel Star | | | 1 | | |
| | 25N069 | 25N127 | Steel Star | Fine | 8 in | 208 | 12 | 4 |
| | 25N070 | 25N128 | Steel Star | Fine | 5 in | 140 | 96 | 4 |
| | 25N071 | 25N129 | Steel Star | Medium | 8 in | 128 | 108 | 4 |
| | 25N072 | 25N130 | Steel Star | Medium | 5 in | 80 | 168 | 4 |
| 19A062 | | | Steel Beam | | | 1 | | |
| | 25M946 | 25N135 | Steel Beam | Fine | 8 in | 208 | 4 | 4 |
| | 25N077 | 25N136 | Steel Beam | Fine | 5 in | 152 | 88 | 4 |
| | 25N078 | 25N137 | Steel Beam | Medium | 8 in | 128 | 112 | 4 |
| | 25N079 | 25N138 | Steel Beam | Medium | 5 in | 80 | 168 | 4 |
| 19A016 | | | Carbide Flail 6 Pt | | | 1 | | |
| | 25N091 | 25N151 | Carbide Flail 6 Pt | Fine | 8 in | 112 | 4 | 4 |
| | 25N092 | 25N152 | Carbide Flail 6 Pt | Fine | 5 in | 76 | 92 | 4 |
| | 25M936 | 25N153 | Carbide Flail 6 Pt | Medium | 8 in | 76 | 88 | 4 |
| | 25N093 | 25N154 | Carbide Flail 6 Pt | Medium | 5 in | 52 | 148 | 4 |
| | 25N094 | 25N155 | Carbide Flail 6 Pt | Coarse | 8 in | 64 | 120 | 4 |
| | 25N095 | 25N156 | Carbide Flail 6 Pt | Coarse | 5 in | 40 | 176 | 4 |
| 19A017 | | | Carbide Flat | | | 1 | | |
| | 25N098 | 25N159 | Carbide Flat | Fine | 8 in | 112 | 8 | 4 |
| | 25N099 | 25N160 | Carbide Flat | Fine | 5 in | 72 | 104 | 4 |
| | 25M938 | 25N161 | Carbide Flat | Medium | 8 in | 76 | 88 | 4 |
| | 25N100 | 25N162 | Carbide Flat | Medium | 5 in | 52 | 152 | 4 |
| | 25N107 | 25N163 | Carbide Flat | Coarse | 8 in | 68 | 112 | 4 |
| | 25N108 | 25N164 | Carbide Flat | Coarse | 5 in | 44 | 168 | 4 |





| Wire Brush | Steel Star | Steel Beam | Carbide Flail | Carbide Flat | Carbide-Tipped Miller | Full-Carbide Miller | QuikCut PCD Flat | Quikcut PCD Fine | Quikcut PCD Coarse |
|---|---|---|---|---|---|---|---|---|---|
| 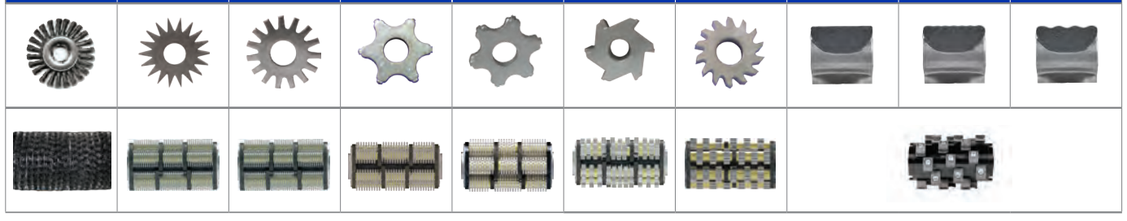 | | | | | | | | | |

| Individual Cutter | Fully Assembled Drum | Drum Rebuild Kit | Cutter Type | Profile | Cut Width | # Cutters | # Spacers | # Rods |
|---|---|---|---|---|---|---|---|---|
| 19A039 | | | Carbide-Tipped Miller | | | 1 | | |
| | 25N112 | 25N167 | Carbide-Tipped Miller | Fine | 8 in | 28 | 36 | 4 |
| | 25N113 | 25N168 | Carbide-Tipped Miller | Fine | 5 in | 20 | 104 | 4 |
| | 25N114 | 25N169 | Carbide-Tipped Miller | Medium | 8 in | 24 | 68 | 4 |
| | 25N115 | 25N170 | Carbide-Tipped Miller | Medium | 5 in | 16 | 140 | 4 |
| | 25M940 | 25N171 | Carbide-Tipped Miller | Coarse | 8 in | 20 | 104 | 4 |
| | 25N116 | 25N172 | Carbide-Tipped Miller | Coarse | 5 in | 12 | 172 | 4 |
| 19A038 | | | Full-Carbide Miller | | | 1 | | |
| | 25N119 | 25N175 | Full-Carbide Miller | Fine | 8 in | 40 | 88 | 4 |
| | 25N121 | 25N176 | Full-Carbide Miller | Fine | 5 in | 28 | 140 | 4 |
| | 25N122 | 25N177 | Full-Carbide Miller | Medium | 8 in | 36 | 104 | 4 |
| | 25N123 | 25N178 | Full-Carbide Miller | Medium | 5 in | 24 | 156 | 4 |
| | 25N124 | 25N179 | Full-Carbide Miller | Coarse | 8 in | 32 | 124 | 4 |
| | 25N125 | 25N180 | Full-Carbide Miller | Coarse | 5 in | 20 | 174 | 4 |

## STANDARD SERIES DRUM COMPONENTS

| Part Number | Description |
|---|---|
| 17W218 | Spacer - Standard Drum |
| 17X056 | Shaft - Standard Drum |
| 17X058 | End Plate - Standard Drum |
| 17X054 | Bare Drum (includes Arbor, Shafts, End Plates, and Fasteners) |

## NEW QUIKCUT PCD DIAMOND CUTTERS

| QuikCut PCD Flat | QuikCut PCD Fine | QuikCut PCD Coarse | Description | Cut Width | # Cutters |
|---|---|---|---|---|---|
| 2001721 | 2001720 | 2003960 | Drum Assembly, 8 in Cut | 8 in | 27 |
| 2003680 | 2003681 | 2004029 | QuikCut PCD Diamond Cutter | | |
| 2004425 | | | Bare Drum (No Cutters) | | |

## DRUM STYLE CUTTERS

# USED ON:
# GrindLazer Pro DC89
# GrindLazer Pro DC1013
# GrindLazer HP DC89
# GrindLazer HP DC1013
# GrindLazer HP DC1021

| Individual Cutter | Fully Assembled Drum | Drum Rebuild Kit | Cutter Type | Profile | Cut Width | # Cutters | # Spacers | # Rods |
|---|---|---|---|---|---|---|---|---|
| | 19A001 | | Wire Brush | Fine | 10” | | | |
| 19A061 | | | Steel Star | | | 1 | | |
| | 25M960 | 25N258 | Steel Star | Fine | 10 in | 330 | 0 | 6 |
| | 25N183 | 25N259 | Steel Star | Fine | 8 in | 252 | 102 | 6 |
| | 25N184 | 25N260 | Steel Star | Fine | 6 in | 180 | 192 | 6 |
| | 25N185 | 25N261 | Steel Star | Medium | 10 in | 198 | 162 | 6 |
| | 25N186 | 25N262 | Steel Star | Medium | 8 in | 156 | 216 | 6 |
| | 25N187 | 25N263 | Steel Star | Medium | 6 in | 120 | 264 | 6 |
| 19A058 | | | Steel Beam | | | 1 | | |
| | 25M962 | 25N270 | Steel Beam | Fine | 10 in | 330 | 12 | 6 |
| | 25N194 | 25N271 | Steel Beam | Fine | 8 in | 264 | 90 | 6 |
| | 25N195 | 25N272 | Steel Beam | Fine | 6 in | 198 | 174 | 6 |
| | 25N196 | 25N273 | Steel Beam | Medium | 10 in | 192 | 168 | 6 |
| | 25N197 | 25N274 | Steel Beam | Medium | 8 in | 156 | 216 | 6 |
| | 25N198 | 25N275 | Steel Beam | Medium | 6 in | 120 | 264 | 6 |
| 19A013 | | | Carbide Flail 8 Pt | | | 1 | | |
| | 25N205 | 25N282 | Carbide Flail 8 Pt | Fine | 10 in | 216 | 12 | 6 |
| | 25N206 | 25N283 | Carbide Flail 8 Pt | Fine | 8 in | 168 | 102 | 6 |
| | 25N207 | 25N284 | Carbide Flail 8 Pt | Fine | 6 in | 120 | 192 | 6 |
| | 25N208 | 25N285 | Carbide Flail 8 Pt | Medium | 10 in | 150 | 133 | 6 |
| | 25N209 | 25N286 | Carbide Flail 8 Pt | Medium | 8 in | 126 | 186 | 6 |
| | 25N210 | 25N287 | Carbide Flail 8 Pt | Medium | 6 in | 96 | 234 | 6 |
| | 25M952 | 25N288 | Carbide Flail 8 Pt | Coarse | 10 in | 120 | 198 | 6 |
| | 25N211 | 25N289 | Carbide Flail 8 Pt | Coarse | 8 in | 96 | 234 | 6 |
| | 25N212 | 25N290 | Carbide Flail 8 Pt | Coarse | 6 in | 66 | 288 | 6 |



| Wire Brush | Steel Star | Steel Beam | Carbide Flail | Carbide Flat | Carbide-Tipped Miller | Full-Carbide Miller | Carbide Pick |
|---|---|---|---|---|---|---|---|
| 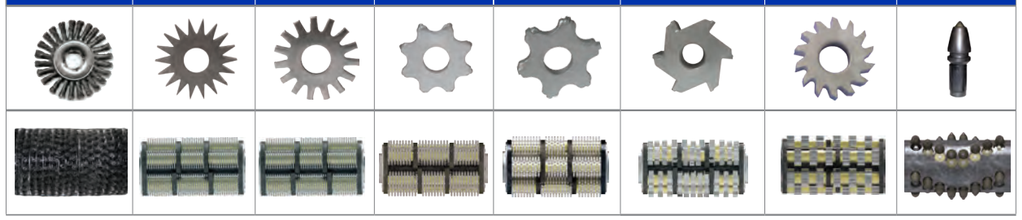 | | | | | | | |

| Individual Cutter | Fully Assembled Drum | Drum Rebuild Kit | Cutter Type | Profile | Cut Width | # Cutters | # Spacers | # Rods |
|---|---|---|---|---|---|---|---|---|
| 19A014 | | | Carbide Flat | | | 1 | | |
| | 25N216 | 25N294 | Carbide Flat | Fine | 10 in | 216 | 12 | 6 |
| | 25N217 | 25N295 | Carbide Flat | Fine | 8 in | 168 | 102 | 6 |
| | 25N218 | 25N296 | Carbide Flat | Fine | 6 in | 120 | 186 | 6 |
| | 25M954 | 25N297 | Carbide Flat | Medium | 10 in | 144 | 144 | 6 |
| | 25N219 | 25N298 | Carbide Flat | Medium | 8 in | 120 | 192 | 6 |
| | 25N220 | 25N299 | Carbide Flat | Medium | 6 in | 96 | 234 | 6 |
| | 25N221 | 25N300 | Carbide Flat | Coarse | 10 in | 108 | 210 | 6 |
| | 25N222 | 25N301 | Carbide Flat | Coarse | 8 in | 90 | 246 | 6 |
| | 25N223 | 25N302 | Carbide Flat | Coarse | 6 in | 66 | 294 | 6 |
| 19A034 | | | Carbide-Tipped Miller | | | 1 | | |
| | 25N227 | 25N306 | Carbide-Tipped Miller | Fine | 10 in | 42 | 132 | 6 |
| | 25N228 | 25N307 | Carbide-Tipped Miller | Fine | 8 in | 36 | 174 | 6 |
| | 25N229 | 25N308 | Carbide-Tipped Miller | Fine | 6 in | 30 | 216 | 6 |
| | 25N230 | 25N309 | Carbide-Tipped Miller | Medium | 10 in | 36 | 174 | 6 |
| | 25N231 | 25N310 | Carbide-Tipped Miller | Medium | 8 in | 30 | 210 | 6 |
| | 25N232 | 25N311 | Carbide-Tipped Miller | Medium | 6 in | 24 | 252 | 6 |
| | 25M956 | 25N312 | Carbide-Tipped Miller | Coarse | 10 in | 30 | 210 | 6 |
| | 25N233 | 25N313 | Carbide-Tipped Miller | Coarse | 8 in | 24 | 252 | 6 |
| | 25N234 | 25N314 | Carbide-Tipped Miller | Coarse | 6 in | 18 | 294 | 6 |
| 19A040 | | | Full-Carbide Miller | | | 1 | | |
| | 25N238 | 25N318 | Full-Carbide Miller | Fine | 10 in | 42 | 156 | 6 |
| | 25N239 | 25N319 | Full-Carbide Miller | Fine | 8 in | 36 | 192 | 6 |
| | 25N241 | 25N320 | Full-Carbide Miller | Fine | 6 in | 30 | 228 | 6 |
| | 25N242 | 25N321 | Full-Carbide Miller | Medium | 10 in | 36 | 192 | 6 |
| | 25N243 | 25N322 | Full-Carbide Miller | Medium | 8 in | 30 | 228 | 6 |
| | 25N244 | 25N323 | Full-Carbide Miller | Medium | 6 in | 24 | 264 | 6 |
| | 25M958 | 25N324 | Full-Carbide Miller | Coarse | 10 in | 30 | 228 | 6 |
| | 25N245 | 25N325 | Full-Carbide Miller | Coarse | 8 in | 24 | 264 | 6 |
| | 25N246 | 25N326 | Full-Carbide Miller | Coarse | 6 in | 18 | 300 | 6 |
| 19A080 | | | Carbide Pick | | | 1 | | |
| | 25M964 | | Carbide Pick | Coarse | 10 in | 32 | | |

## PRO/HP DRUM COMPONENTS

| Part Number | Description |
|---|---|
| 19A415 | Spacer - Pro/HP Drum |
| 17W991 | Shaft - Pro/HP Drum |
| 17W983 | End Plate - Pro/HP Drum |
| 17W989 | Bare Drum (includes Arbor, Shafts, End Plates, and Fasteners) |

DRUM STYLE CUTTERS

| Diamond BLADE | QuikCut PCD Flat | QuikCut PCD Fine | QuikCut PCD Coarse |
|---|---|---|---|
| | | | |
| | | | |

## NEW Pro/HP Series QuikCut PCD Diamond Drums

| QuikCut PCD Flat | QuikCut PCD Fine | QuikCut PCD Coarse | Description | Cut Width | # Cutters |
|---|---|---|---|---|---|
| 2001725 | 2001724 | 2003962 | Drum Assembly, 10 in Cut | 10 in | 39 |
| 2001723 | 2001722 | 2003961 | Drum Assembly, 5 in Cut | 5 in | 21 |
| 2003680 | 2003681 | 2004029 | QuikCut PCD Diamond Cutter (Single) | | |
| 2004426 | | | Bare Drum (No Cutters) | | |

## Pro/HP Series Diamond Blades

| Part # | Description | Cut Width | # Blades | 1/8 in Spacer | 1/4 in Spacer | Square Key |
|---|---|---|---|---|---|---|
| 24D583 | Diamond Drum, 10 in Cut, No Spacing | 10 in | 38 | 39 | 2 | 2 |
| 24B965 | Diamond Drum, 5 in Cut, No Spacing | 5 in | 19 | 21 | 21 | 2 |

| | |
|---|---|
| 24E289 | Diamond Blade |
| 16A259 | Threaded End Plate - Diamond Drum |
| 24D982 | Mandrel - Diamond Drum |
| 16A258 | 1/8 in Spacer |
| 16A257 | 1/4 in Spacer |
| 123252 | Key - Diamond Drum |

Diamond Blade

Diamond Drum Assembly

## USED ON:
## HP DC1538 G DCS
## HP DC1525 P DCS
## HP DC1520 E DCS

## NEW DC15 Series QuikCut PCD Diamond Drums

| QuikCut PCD Flat | QuikCut PCD Fine | QuikCut PCD Coarse | Description | Cut Width | # Cutters |
|---|---|---|---|---|---|
| 2001727 | 2001726 | 2003963 | Drum Assembly, 15 in Cut | 15 in | 80 |
| 2003680 | 2003681 | 2004029 | QuikCut PCD Diamond Cutter (Single) | | |
| 2004427 | | | Bare Drum (No Cutters) | | |

*High-Speed Pulley Kit required for PCD and Diamond drums

QuikCut PCD Diamond Drum Assembly

## HP DC15 Series Diamond Blades

| Asphalt Blade | Concrete Blade | Description | # Blades | 1/10 in Spacer | 1/8 in Spacer | 1/2 in Spacer |
|---|---|---|---|---|---|---|
| 25B382 | 25B383 | Diamond Drum, 15 in Cut, no spacing | 58 | 0 | 59 | 2 |
| 25B384 | 25B385 | Diamond Drum, 15 in Cut, 1/8 in spacing | 43 | 42 | 44 | 2 |
| 19A106 | 19A107 | Diamond Blade | | | | |

| | |
|---|---|
| 19B428 | 1/10 in Spacer |
| 19B430 | 1/8 in Spacer |
| 19B429 | 1/2 in Spacer |
| 19B427 | Bare Drum (includes Mandrel, End Plate, and Keys) |

*High-Speed Pulley Kit required for PCD and Diamond drums

Diamond Blade

Diamond Drum Assembly

## HP DC15 Series Carbide Flail Cutters

| Fully Assembled Drum | Drum Rebuild Kits | Description | Cutter Type | # Cutters | # Spacers | # Rods |
|---|---|---|---|---|---|---|
| 25B386 | 19B404 | Carbide Flail Drum, 15 in Cut, Fine Profile | Carbide Flail 8 Pt | 210 | 5 | 5 |
| 25B387 | 19B405 | Carbide Flail Drum, 15 in Cut, Medium Profile | Carbide Flail 8 Pt | 155 | 120 | 5 |
| 25B388 | 19B406 | Carbide Flail Drum, 15 in Cut, Coarse Profile | Carbide Flail 8 Pt | 120 | 200 | 5 |

| | |
|---|---|
| 19A027 | Individual Cutter |
| 19B433 | Spacer |
| 19B432 | Rod |
| 19B434 | End Plate |
| 19B431 | Bare Drum (includes Arbor, Shafts, End Plates, and Fasteners |

*Standard-Speed Pulley Kit required for Carbide Flail Cutters

Carbide Flail


Carbide Flail Drum Assembly

ROTARY STYLE CUTTERS

## USED ON:
## GrindLazer Pro RC813
## GrindLazer HP RC820 H
## GrindLazer HP RC1625 G
## GrindLazer HP RC1640 H

| Wire Brush | Carbide Pin 72 | Carbide Pin 48 | Carbide Pin 24 | Carbide Pick |
|---|---|---|---|---|
| | | | | |
| | | | | |

| Cutters Only (Complete Set) | Cutter Assembly |
|---|---|
| 25N330 | 25N333 |
| 19A089 | 25N365 |
| 19A088 | 25N364 |
| 19A087 | 25N363 |
| 25N332 | 25N335 |

| Cutter Type | Profile | Cut Width |
|---|---|---|
| Wire Brush | Fine | 8 in |
| Carbide Pin 72 | Fine | 8 in |
| Carbide Pin 48 | Medium | 8 in |
| Carbide Pin 24 | Coarse | 8 in |
| Carbide Pick | Medium | 8 in |

# LINEDRIVER AND LINEDRIVER HD

## WHY WALK WHEN YOU CAN RIDE?

Graco LineDriver attachments connect to your GrindLazer to provide the most innovative, user-friendly ride-on systems available to double your productivity.

### SOLUTIONS THAT IMPROVE YOUR PRODUCTIVITY

#### RIDE WITH EASE

**Patented Dual Foot Pedal System**

- Adjustable pedals to fit every user
- Forward and reverse capability

#### EASY STARTING

**Exclusive ProStart™ Engine Starting System (LineDriver HD w/ Honda Engine)**

- Up to 50% less pulling effort to start the engine

**Electric Start (Vanguard Engine)**

- Simple starting with the turn of a key

#### ULTIMATE COMFORT

**Cool-Comfort™ Seat**

- Gray color stays cool in direct sunlight
- High-back seat for added support
- Extra padding for all-day comfort

#### LOW-LIGHT ACCURACY

**FlexBeam™ LED Light System**

- LED light for improved brightness with long life and less amp draw
- Retractable, breakaway design prevents damage and keeps you striping

#### RELIABLE POWER

**Choose Your Engine**

- Honda GX Engine
- Briggs & Stratton Vanguard™ Engine with electric start

| LINEDRIVERS | PART # |
|---|---|
| LineDriver | 262004 |
| LineDriver HD | 262005 |
| LineDriver HD w/ Electric Start Vanguard Engine | 25U474 |

# LAZERVAC VACUUMS

## 230, 330, AND 550

When used in conjunction with the GrindLazer family of products, Graco's LazerVac Systems reduce airborne silica dust and help meet OSHA's safety requirement for airborne silica dust. *Available in electric 110/220 volt in the LazerVac 230 and 330 models, as well as a high-pressure Honda Powered System in the LazerVac 550.

### SAFER JOBSITES

**OSHA-Compliant Filtration***

- Removes silica dust, resulting in a safer environment

### REDUCED FILTER CLOGGING

**Auto-Filter Cleaning**

- Separate motor operates dual paddles, which knock down the debris from the filter while you work — preventing filter clogs

### MORE UPTIME

**Toolless Filter Design**

- Allows for quick filter change-out while on the job

### REDUCED SILICA DUST

**Longopac® Bag System** (LazerVac 550 only)

- Continuous dust containment means less exposure to silica dust
- Large capacity for more run time, less downtime

*60% more vacuum pressure when compared to LazerVac 230*

** LazerVac vacuums include a filter-cleaning mechanism and meet 99% efficiency requirement of OSHA 1926.1153 Table 1 for outdoor use with walk-behind milling machines and floor grinders. LazerVac vacuums include a filter-cleaning mechanism and can meet OSHA 1926.1153 Table 1 requirement of 25 CFM minimum per inch of grinder wheel for non-mortar handhelds.*

| LAZERVAC VACUUMS | PART # |
|---|---|
| LazerVac 230 | 25M858 |
| LazerVac 330 | 25E237 |
| LazerVac 550 | 25M860 |

| LAZERVAC ACCESSORIES | PART # |
|---|---|
| Bags for LazerVac 230/330 and Cyclone 20 (20 pack) | 17X695 |
| Bags for Cyclone 32 (20 pack) | 17X216 |
| Longopac Bag for LazerVac 550 and Cyclone LP (20 m long) | 17W295 |
| Filter for LazerVac 230/330 | 17X185 |
| Filter Bags for LazerVac 550 (set of 7) | 17X238 |
| Standard Secondary Filter for LazerVac 550 (set of 2) | 17X247 |
| HEPA Secondary Filter for LazerVac 550 (set of 2) | 17Y254 |





# CYCLONE SEPARATORS

## 20, 32, AND LP

Add one of Graco's Cyclone Separators in-line with the LazerVac to collect the larger debris prior to getting to the vacuum filter — greatly extending the time between filter changes.

*Recommended for use with the LazerVac 230 and LazerVac 330*

*Recommended for use with LazerVac vacuums*

*Recommended for use with the LazerVac 550*

### REDUCED FILTER CLOGGING

**Cyclone Design**

- Removes large debris before it gets to the vacuum filter, reducing filter clogging, which allows you to work longer
- No maintenance design — just empty canister when it is full

### LONGER RUN TIME

**Large Capacity**

- Choose between high-capacity drum or bag collection options - depending on your job

### JOBSITE READY

**All-Steel Construction**

- Heavy-duty design will stand up to the harsh jobsite environment

| LAZERVAC AND CYCLONE HOSES | PART # |
|---|---|
| Standard Vacuum Hose (30 ft) | 17X156 |
| High-Temp Vacuum Hose (30 ft) | 17X704 |
| Separator/Vacuum Connection Hose (5 ft) | 17X693 |

| CYCLONE SEPARATORS | PART # |
|---|---|
| Cyclone 20 | 25M861 |
| Cyclone 32 | 25M862 |
| Cyclone LP | 25R090 |

## SPECIFICATIONS

| | HANDHELD SERIES | STANDARD SERIES | | PRO SERIES | |
|---|---|---|---|---|---|
| | | | | | |
| **Unit Model** | **GrindLazer DC21 E** | **GrindLazer DC87 G** | **GrindLazer DC89 G** | **GrindLazer DC89 G** | **GrindLazer DC1013 G** |
| **WEIGHT LB (KG)** | 12 (5.5) | 150 (68) | 160 (73) | 190 (86) | 230 (104) |
| **CUTTER TYPE** | Drum | Drum | Drum | Drum | Drum |
| **MAX WORKING WIDTH** | 2 in | 8 in | 8 in | 8 in | 10 in |
| **CUTTER DRUM DIAMETER** | 4 in | 5 in | 5 in | 7 in | 7 in |
| **ENGINE/MOTOR** | 110V Makita | 6.5 HP Honda | 9 HP Honda | 9 HP Honda | 13 HP Honda |
| **ENGINE START** | N/A | Pull Start | Pull Start | Pull Start | Pull Start |
| **AIR FILTER** | N/A | Cyclone™ | Cyclone | Cyclone | Cyclone |
| **TACH/HOUR METER** | NO | YES | YES | YES | YES |
| **MAX CUT RATE (WALK)** | 100 sq ft/hr | 300 sq ft/hr | 400 sq ft/hr | 400 sq ft/hr | 700 sq ft/hr |
| **MAX CUT RATE (LINEDRIVER)** | N/A | N/A | N/A | N/A | N/A |
| **LINEDRIVER / SKID LOADER COMPATIBLE** | NO | NO | NO | NO | NO |
| **VACUUM PORT** | YES | YES | YES | YES | YES |
| **WATER CONNECTION** | NO | Optional | Optional | Optional | Optional |
| **ELECTRONIC DEPTH CONTROL SYSTEM** | NO | NO | NO | NO | NO |
| **GRINDLAZER (BARE)** | – | 25M842 | 25M843 | 25N667 | 25M846 |
| **GRINDLAZER W/ WIRE BRUSH DRUM** | – | 26A573 | 26A584 | 26A706 | 26A617 |
| **GRINDLAZER W/ STEEL STAR, FINE DRUM** | – | 26A574 | 26A585 | 26A707 | 26A618 |
| **GRINDLAZER W/ STEEL BEAM, FINE DRUM** | – | 26A575 | 26A586 | 26A708 | 26A619 |
| **GRINDLAZER W/ CARBIDE FLAIL, FINE DRUM** | – | 26A577 | 26A588 | 26A710 | – |
| **GRINDLAZER W/ CARBIDE FLAIL, MEDIUM DRUM** | 25M841 | 26A576 | 26A587 | 26A709 | 26A620 |
| **GRINDLAZER W/ CARBIDE FLAIL, COARSE DRUM** | – | – | – | – | 26A621 |
| **GRINDLAZER W/ CARBIDE FLAT, FINE DRUM** | – | 26A579 | 26A590 | 26A711 | – |
| **GRINDLAZER W/ CARBIDE FLAT, MEDIUM DRUM** | – | 26A578 | 26A589 | 26A769 | 26A622 |
| **GRINDLAZER W/ CARBIDE FLAT, COARSE DRUM** | – | – | – | – | 26A623 |
| **GRINDLAZER W/ CARBIDE-TIPPED MILLER, FINE DRUM** | – | 26A581 | 26A592 | 26A713 | 26A625 |
| **GRINDLAZER W/ CARBIDE-TIPPED MILLER, MEDIUM DRUM** | – | 26A580 | 26A591 | 26A712 | 26A624 |
| **GRINDLAZER W/ FULL-CARBIDE MILLER, FINE DRUM** | – | 26A583 | 26A594 | 26A715 | 26A627 |
| **GRINDLAZER W/ FULL-CARBIDE MILLER, MEDIUM DRUM** | – | 26A582 | 26A593 | 26A714 | 26A626 |
| **GRINDLAZER W/ CARBIDE PICK, FINE DRUM** | – | – | – | – | – |
| **GRINDLAZER W/ DIAMOND DRUM, 10" CUT** | – | – | – | – | – |
| **GRINDLAZER W/ DIAMOND DRUM, 5" CUT** | – | – | – | – | – |
| **GRINDLAZER W/ QUIKCUT PCD FLAT DRUM, 10" CUT** | – | – | – | – | 2004801 |
| **GRINDLAZER W/ QUIKCUT PCD FLAT DRUM, 8" CUT** | – | 2004794 | 2004797 | – | – |
| **GRINDLAZER W/ QUIKCUT PCD FLAT DRUM, 5" CUT** | – | – | – | – | 2004802 |
| **GRINDLAZER W/ QUIKCUT PCD FINE DRUM, 10" CUT** | – | – | – | – | 2004803 |
| **GRINDLAZER W/ QUIKCUT PCD FINE DRUM, 8" CUT** | – | 2004795 | 2004798 | – | – |
| **GRINDLAZER W/ QUIKCUT PCD FINE DRUM, 5" CUT** | – | – | – | – | 2004804 |
| **GRINDLAZER W/ QUIKCUT PCD COARSE DRUM, 10" CUT** | – | – | – | – | 2004805 |
| **GRINDLAZER W/ QUIKCUT PCD COARSE DRUM, 8" CUT** | – | 2004796 | 2004799 | – | – |
| **GRINDLAZER W/ QUIKCUT PCD COARSE DRUM, 5" CUT** | – | – | – | – | 2004806 |
| **APPLICATIONS** | • Touch-Ups<br>• Edge Work<br>• Walls | • Traffic Paint Removal<br>• Thermoplastic Removal<br>• Smoothing Uneven Surfaces<br>• Coating Removal<br>• Trip Hazard Removal | | | • Traffic Paint Removal<br>• Thermoplastic Removal<br>• Smoothing Uneven Surfaces<br>• Epoxy Removal<br>• Inlay Grooving (Requires High Speed Pulley Kit - 25M893) |



| PRO SERIES | HIGH PRODUCTION SERIES | | | | |
|---|---|---|---|---|---|
| | | | | | |
| **GrindLazer DC1013 G DCS** | **GrindLazer DC89 G** | **GrindLazer DC1013 G** | **GrindLazer DC1013 G DCS** | **GrindLazer DC1021 G** | **GrindLazer DC1021 G DCS** |
| 260 (118) | 300 (136) | 310 (141) | 340 (154) | 350 (159) | 360 (163) |
| Drum | Drum | Drum | Drum | Drum, Reverse Cut | Drum, Reverse Cut |
| 10 in | 8 in | 10 in | 10 in | 10 in | 10 in |
| 7 in | 7 in | 7 in | 7 in | 7 in | 7 in |
| 13 HP Honda | 9 HP Honda | 13 HP Honda | 13 HP Honda | 21 HP Vanguard | 21 HP Vanguard |
| Electric Start | ProStart | ProStart | Electric Start | Electric Start | Electric Start |
| Cyclone | Cyclone | Cyclone | Cyclone | Donaldson® Heavy-Duty | Donaldson® Heavy-Duty |
| YES | YES | YES | YES | YES | YES |
| 700 sq ft/hr | 600 sq ft/hr | 800 sq ft/hr | 800 sq ft/hr | N/A | N/A |
| N/A | 1,300 sq ft/hr | 1,700 sq ft/hr | 1,700 sq ft/hr | 2,100 sq ft/hr | 2,100 sq ft/hr |
| NO | Optional | Optional | Optional | Required | Required |
| YES | YES | YES | YES | YES | YES |
| Optional | Optional | Optional | Optional | Optional | Optional |
| YES | NO | NO | YES | NO | YES |
| 25N668 | 25M992 | 25M993 | 25N658 | 25M994 | 25N659 |
| 26A716 | 26A658 | 26A669 | 26A733 | 26A681 | 26A745 |
| 26A717 | 26A659 | 26A670 | 26A734 | 26A682 | 26A746 |
| 26A718 | 26A660 | 26A671 | 26A735 | 26A683 | 26A747 |
| – | 26A662 | – | – | – | – |
| 26A719 | 26A661 | 26A672 | 26A736 | 26A684 | 26A748 |
| 26A720 | – | 26A673 | 26A737 | 26A685 | 26A749 |
| – | 26A664 | – | – | – | – |
| 26A721 | 26A663 | 26A674 | 26A738 | 26A686 | 26A750 |
| 26A722 | – | 26A675 | 26A739 | 26A687 | 26A751 |
| 26A724 | 26A666 | 26A677 | 26A741 | 26A689 | 26A753 |
| 26A723 | 26A665 | 26A676 | 26A740 | 26A688 | 26A752 |
| 26A726 | 26A668 | 26A679 | 26A743 | 26A693 | 26A755 |
| 26A725 | 26A667 | 26A678 | 26A742 | 26A692 | 26A754 |
| 26A727 | – | 26A680 | 26A744 | 26A694 | 26A756 |
| – | – | – | – | 25N360 | 26A757 |
| – | – | – | – | 25N361 | 26A758 |
| 2004807 | – | 2004813 | 2004819 | 2004825 | 2004831 |
| – | – | – | – | – | – |
| 2004808 | – | 2004814 | 2004820 | 2004826 | 2004832 |
| 2004809 | | 2004815 | 2004821 | 2004827 | 2004833 |
| – | – | – | – | – | – |
| 2004810 | | 2004816 | 2004822 | 2004828 | 2004834 |
| 2004811 | – | 2004817 | 2004823 | 2004829 | 2004835 |
| – | – | – | – | – | – |
| 2004812 | – | 2004818 | 2004824 | 2004830 | 2004836 |
| • Traffic Paint Removal<br>• Thermoplastic Removal<br>• Smoothing Uneven Surfaces<br>• Epoxy Removal<br>• Inlay Grooving (Requires High Speed Pulley Kit - 25M893) | • Traffic Paint Removal<br>• Thermoplastic Removal<br>• Smoothing Uneven Surfaces | • Traffic Paint Removal<br>• Thermoplastic Removal<br>• Smoothing Uneven Surfaces<br>• Epoxy Removal | | • Traffic Paint Removal<br>• Thermoplastic Removal<br>• Smoothing Uneven Surfaces<br>• Epoxy Removal<br>• Inlay Grooving | |

## SPECIFICATIONS

| | HANDHELD SERIES | PRO SERIES | | HIGH PRODUCTION SERIES | | |
|---|---|---|---|---|---|---|
| | | | | | | |
| **Unit Model** | **GrindLazer RC71 E** | **GrindLazer RC813 G** | **GrindLazer RC813 G DCS** | **GRINDLAZER RC820 H** | **GRINDLAZER RC1640 H** | **GRINDLAZER RC1625 G** |
| **WEIGHT LB (KG)** | 15 (6.8) | 450 (204) | 460 (209) | 480 (218) | 956 (434) | 956 (434) |
| **CUTTER TYPE** | Rotary | Rotary | Rotary | Rotary | Rotary | Rotary |
| **MAX WORKING WIDTH** | 7 in | 8 in | 8 in | 8 in | 16 in | 16 in |
| **ENGINE/MOTOR** | 110 V Makita | 13 HP Honda | 13 HP Honda | 20 HP Hydraulic | 40 HP Hydraulic | 25 HP Kohler Gas |
| **ENGINE START** | N/A | Electric Start | Electric Start | N/A | N/A | Electric Start |
| **AIR FILTER** | N/A | Standard | Standard | N/A | N/A | Standard |
| **TACH/HOUR METER** | NO | YES | YES | YES | YES | YES |
| **MAX CUT RATE (WALK)** | 100 sq ft/hr | 800 sq ft/hr | 800 sq ft/hr | N/A | N/A | N/A |
| **MAX CUT RATE (LINEDRIVER/SKID LOADER)** | N/A | N/A | N/A | 1000 sq ft/hr | 2400 sq ft/hr | 2400 sq ft/hr |
| **LINEDRIVER/SKID LOADER COMPATIBLE** | NO | NO | NO | Bob-Tach® Skid Loader Connection | | |
| **VACUUM PORT** | YES | YES | YES | YES | YES | YES |
| **WATER CONNECTION** | NO | NO | NO | NO | NO | NO |
| **ELECTRONIC DEPTH CONTROL SYSTEM** | NO | NO | YES | NO | NO | NO |
| **GRINDLAZER (BARE)** | – | 25M847 | 25N669 | 25P471 | 25P472 | 25P473 |
| **GRINDLAZER W/ CARBIDE FLAIL, MEDIUM DRUM** | 25M848 | – | – | – | – | – |
| **GRINDLAZER W/ WIRE ROTARY BRUSH** | – | 26A653 | 26A728 | 25R245 | 25R286 | 25R287 |
| **GRINDLAZER W/ CARBIDE PIN 72 ROTARY** | – | 26A654 | 26A729 | 25R288 | 25R289 | 25R290 |
| **GRINDLAZER W/ CARBIDE PIN 48 ROTARY** | – | 26A655 | 26A730 | 25R291 | 25R292 | 25R293 |
| **GRINDLAZER W/ CARBIDE PIN 24 ROTARY** | – | 26A656 | 26A731 | 25R296 | 25R295 | 25R294 |
| **GRINDLAZER W/ CARBIDE PICK ROTARY** | – | 26A657 | 26A732 | 25R297 | 25R298 | 25R299 |
| **APPLICATIONS** | • Touch-Ups<br>• Edge Work<br>• Walls | • Traffic Paint Removal<br>• Thermoplastic Removal<br>• Surface Prep Prior to Applying Markings | | | | |

| Unit Model | GrindLazer DC1538 G DCS | GrindLazer DC1525 P DCS | GrindLazer DC1520 E DCS |
|---|---|---|---|
| **WEIGHT LB (KG)** | 725 (329) | 715 (324) | 910 (413) |
| **CUTTER TYPE** | Drum | Drum | Drum |
| **MAX WORKING WIDTH** | 15 in | 15 in | 15 in |
| **CUTTER DRUM DIAMETER** | 10 in | 10 in | 10 in |
| **ENGINE/MOTOR** | 38 HP Kohler EFI Gas | 25 HP Kohler EFI Propane | 20 HP, 480v, 3ph |
| **ENGINE START** | Electric Start | Electric Start | N/A |
| **AIR FILTER** | Heavy-Duty | Heavy-Duty | N/A |
| **TACH/HOUR METER** | YES | YES | YES |
| **MAX CUT RATE** | 3,500 sq ft/hr | 3,500 sq ft/hr | 3,500 sq ft/hr |
| **LINEDRIVER COMPATIBLE** | NO | NO | NO |
| **VACUUM PORTS** | 2 | 2 | 2 |
| **ELECTRONIC DEPTH CONTROL SYSTEM** | YES | YES | YES |
| **GRINDLAZER W/ HIGH-SPEED PULLEY KIT FOR DIAMOND / PCD DRUMS** | 25P474 | 25P475 | 25P476 |
| **GRINDLAZER W/ LOW-SPEED PULLEY KIT FOR CARBIDE FLAIL DRUMS** | 25R100 | 25R101 | 25R102 |
| **APPLICATIONS** | • Leveling Uneven Surfaces<br>• Coating Removal<br>• Inlay and Grooving<br>• Removing Traffic Markings | | |



| | VACUUMS | | | SEPARATORS | | |
|---|---|---|---|---|---|---|
| | | | | | | |
| **Unit Model** | **LazerVac 230** | **LazerVac 330** | **LazerVac 550** | **Cyclone 20 Separator** | **Cyclone 32 Separator** | **Cyclone LP Separator** |
| **PART NUMBER** | 25M858 | 25E237 | 25M860 | 25M861 | 25M862 | 25R090 |
| **AIR POWER** | 925 Air-Watts | 1,665 Air-Watts | 2,045 Air-Watts | – | – | – |
| **AIR FLOW** | 260 CFM | 375 CFM | 300 CFM | – | – | – |
| **VACUUM PRESSURE** | 90" Water | 100" Water | 150" Water | – | – | – |
| **CAPACITY** | 20 gal | 20 gal | Bag Collection | 20 gal | 32 gal | Bag Collection |
| **ENGINE/MOTOR** | 2.0 HP, 110V | 3.0 HP, 230V | 13 HP Honda | – | – | – |

| | LINEDRIVERS | | |
|---|---|---|---|
| | | | |
| **Unit Model** | **LineDriver** | **LineDriver HD** | **LineDriver HD W/Electric Start** |
| **PART NUMBER** | 262004 | 262005 | 25U474 |
| **OPERATING SPEED:**<br>**FORWARD MPH (KM/H)**<br>**REVERSE MPH (KM/H)** | <br>to 10 (16)<br>to 6 (10) | <br>to 10 (16)<br>to 6 (10) | <br>to 10 (16)<br>to 6 (10) |
| **ENGINE SIZE CC (HP)** | Honda 160 (5.5) | Honda 200 (6.5) | Briggs & Stratton Vanguard 203 (6.5) |
| **WEIGHT LB (KG)** | 265 (120) | 275 (125) | 275 (125) |
| **FUEL CAPACITY GAL (LTRS)** | .95 (3.6) | .95 (3.6) | .82 (3.1) |
| **ENGINE STARTING SYSTEM** | Manual Pull | ProStart | Electric Start |

# SCARIFY WITH CONFIDENCE

## Industry-Leading Warranty Protection

Behind every piece of equipment we manufacture is the industry's strongest warranty. You may never need to use Graco's warranty — but if you do, we will be there.

### 1-YEAR WARRANTY*

Coverage against defects in materials and workmanship on the entire GrindLazer.

### 3-YEAR ENGINE WARRANTY*

If the engine fails from normal use, the engine manufacturer will replace it under warranty for the original owner for 3 years.

### CONVENIENT SERVICE

Graco offers authorized distributor locations in North America for service and warranty repair.

**NORTH AMERICA ONLY. See your local Graco Distributors for country specifics. See printed product warranty for complete warranty terms and conditions.*

**Nobody Else Builds Scarifiers Like This.**

**For more information visit graco.com**

Every Graco purchase comes with A+ Customer Service.

Questions?
Call (844) 241-9499

©2024 Graco Inc. 344384 Rev. J 1/24 All written and visual data contained in this document are based on the latest product information available at the time of publication. Graco reserves the right to make changes at any time without notice. Trademarks are referenced herein for identification purposes only. All trademarks are the property of their respective owners. Product covered by issued and pending patents, see graco.com/patents